



# Essentialube®

*Engine Treatment & Flush*



## The Essential Tool for Performance and Reliability

You take pride in maintaining your fleet at prime condition, but engine and fuel issues always develop where they can't be seen. Essentialube keeps both diesel and gasoline vehicles running efficiently by cleaning the engine and fuel system from the inside. Essentialube lubricates as it cleans, reducing component wear while safely dissolving deposits in order to keep internal parts moving, extend oil drain effectiveness and maximize the life of new oil. Essentialube counteracts the corrosive effects of moisture and ethanol, and works to prevent ethanol-water phase separation. Essentialube's unique formula will not unbalance lubricant chemistry or void manufacturer's warranties, and will not adversely affect on-board filters.

### ESSENTIAL TO


- Restoring engine power and performance
- Removing sludge, gums, varnish and deposits
- Reducing smoking and oil consumption
- Extending mileage between oil drains
- Stabilizing fuel and oil
- Cleaning and lubricating upper cylinders
- Dispersing moisture and preventing corrosion

### ESSENTIALUBE DISSOLVES AND DISPERSES FUEL AND OIL DEPOSITS

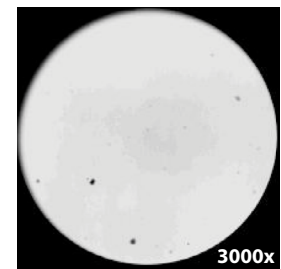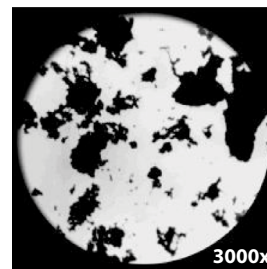

Fuel and lubricant breakdown leaves behind deposits which can lead to abrasive wear, sticking and advanced degradation of new fluid. Essentialube dissolves and disperses these deposits for a truly complete oil change.

➤ <b>Application</b>	➤ <b>Problem</b>	➤ <b>Solution</b>	➤ <b>Benefit</b>
<b>Engine Flushing</b> (all types)	<ul style="list-style-type: none"> <li>Existing sludge &amp; deposits</li> <li>Smoking</li> <li>Oil consumption</li> <li>Sluggish performance</li> </ul>	Add 2 to 4 ounces of Essentialube per quart of oil used in engine. Operate normally up to 1 week prior to changing oil.	<ul style="list-style-type: none"> <li>Keeps engine clean</li> <li>Maximizes life of new engine oil</li> <li>Deglazes piston rings &amp; seals</li> <li>Improves engine performance</li> </ul>
<b>Transmission Flushing</b> (Manual & Automatic)	<ul style="list-style-type: none"> <li>Existing sludge &amp; deposits</li> <li>Hard shifts</li> <li>Shift hesitation</li> </ul>	Add 2 ounces of Essentialube per quart of used fluid in transmission. Operate normally up to 1 week prior to changing transmission fluid.	<ul style="list-style-type: none"> <li>Keeps transmission clean</li> <li>Maximizes life of new fluid</li> <li>Frees sticking servo-valves</li> </ul>
<b>Fuel System</b> (Diesel & Gasoline)	<ul style="list-style-type: none"> <li>Gums &amp; deposits</li> <li>Poor combustion</li> <li>Ethanol-water separation</li> </ul>	Add 1 ounce of Essentialube per gallon of diesel or gasoline fuel for fuel system cleanup. Add 1/2 ounce of Essentialube per gallon of diesel or gasoline fuel for continuous use.	<ul style="list-style-type: none"> <li>Keeps fuel system clean</li> <li>Improves combustion</li> <li>Improves performance</li> <li>Disperses moisture</li> </ul>
<b>Engine Oil &amp; Transmission Fluid Supplement</b>	<ul style="list-style-type: none"> <li>Sludge &amp; deposit formation</li> <li>Loss of performance</li> </ul>	Add 2 ounces of Essentialube per quart of lubricating oil	<ul style="list-style-type: none"> <li>Prevents sludge &amp; deposits</li> <li>Maintains equipment performance</li> <li>Extends oil life</li> </ul>
<b>Seasonal Storage</b>	<ul style="list-style-type: none"> <li>Rust &amp; corrosion buildup</li> <li>Fuel degradation</li> <li>Oil degradation</li> <li>Condensation</li> </ul>	Add 2 ounces of Essentialube per gallon of fuel capacity and fill tank with fuel. Add 2 ounces of Essentialube per quart of engine oil. Run engine at idle for 5 to 10 minutes prior to placing in storage.	<ul style="list-style-type: none"> <li>Prevents rust &amp; corrosion</li> <li>Extends oil life</li> <li>Stabilizes fuel</li> <li>Disperses moisture</li> </ul>

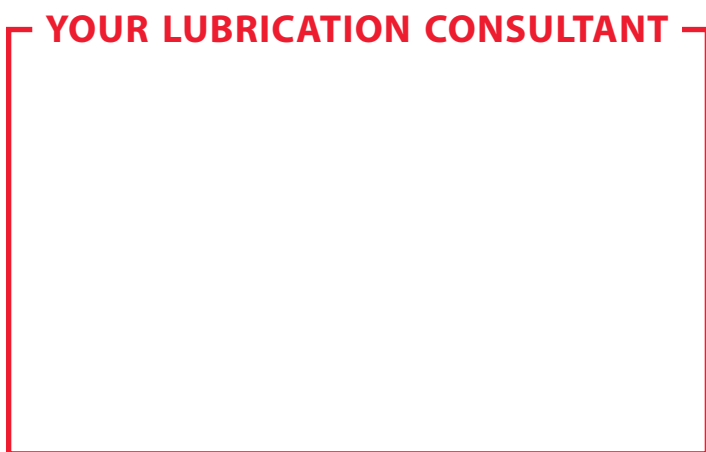

## About Hydrotex®

Hydrotex® is a manufacturer and distributor of high performance lubricant and fuel improver solutions. As an employee owned company, we help our customers develop sustainable solutions designed to help improve system reliability, save energy, limit pollution, extend fixed asset life, reduce maintenance costs and improve fuel efficiency. Our products and services leverage over 80 years of innovation resulting in superior lubrication solutions.

## The Hydrotex Warranty

When properly stored and used in accordance with instructions, any material not satisfactory will be replaced with any product in our line on a dollar for dollar basis provided the account is paid in full when due, and Hydrotex is notified, in writing, within 12 months of the date of the order by the customer.